




Hoyland Medical
Service and quality to the medical profession

erbe
power your performance.

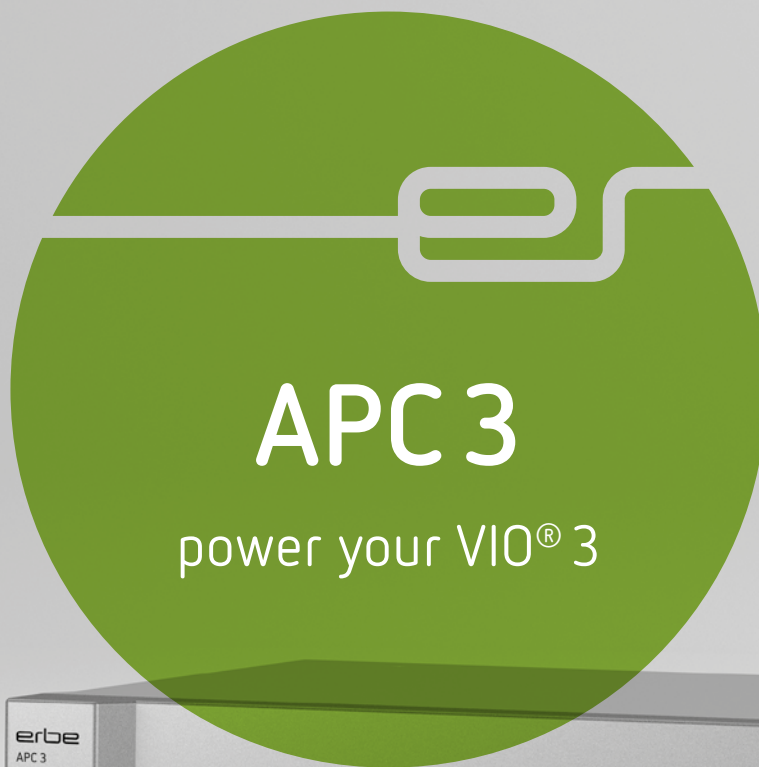

Hoyland Medical
Service and quality to the medical profession


Unit 7, 22 Palmer Place
Murarrie QLD 4172
T: 07 3390 7011

E: admin@hoylandmedical.com.au

Argon plasma coagulation with the user-friendly VIO® 3



The benefits of the logical and intuitive VIO3 interface are now also available with APC3. As your stepGUIDE, the interface guides you through each menu, suggesting experienced starting settings for APC applications.

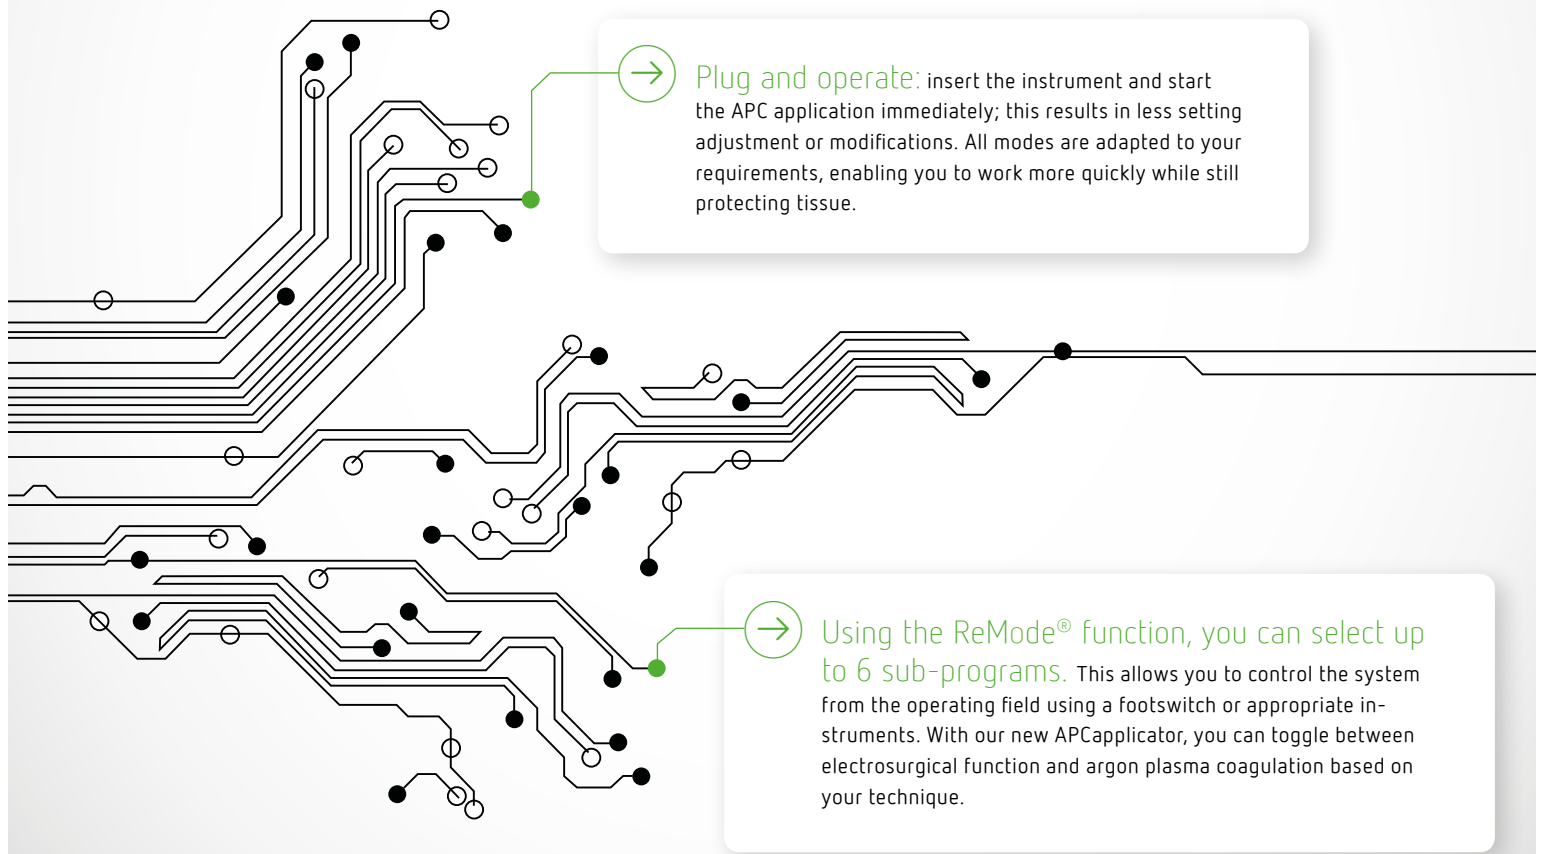

Plug and operate: insert the instrument and start the APC application immediately; this results in less setting adjustment or modifications. All modes are adapted to your requirements, enabling you to work more quickly while still protecting tissue.



Using the ReMode® function, you can select up to 6 sub-programs. This allows you to control the system from the operating field using a footswitch or appropriate instruments. With our new APCapplicator, you can toggle between electro-surgical function and argon plasma coagulation based on your technique.



Multi-modality – finely adjustable APC modes



Our APC3 modes support the full range of APC applications. In addition, the APC3 facilitates argon-supported cutting, and you can also benefit from the new options offered by our proprietary hybrid technologies – APC combined with our electro-surgical or waterjet technology.

ALL APC MODES ARE INTEGRATED INTO THE VIO® 3:

pulsedAPC® and **forcedAPC** are performed using an even finer, 100-increment effect setting for precisely-adjustable devitalization.

The **preciseAPC®** mode is used for hemostasis, particularly in the low-energy range and for sensitive structures to facilitate coagulation with minimal penetration.



IT'S NEVER BEEN EASIER:

After selecting a mode, you can adjust the selected mode via the effect setting. It is easy to track the setting configurations and modifications on the large display. Due to precision adjustment, the optimal settings for ablation and coagulation can be refined. The rapid measurement and control technology (logging of 25 million measurements/sec) ensures highly reproducible and homogenous tissue effects.

THE APC SOCKET – YOUR CONNECTION FOR APC FILTERED INSTRUMENTS*

The single use APC instruments can be used for your procedure immediately without time-consuming re-processing. This is because the filter is already integrated into the connection plug of the FiAPC® probes and of the APCapplicator. "Plug and Operate" thus also stands for immediate availability and utilization of the instruments. The light-weight and easy-to-handle APCapplicator also offers user-friendly activation of all functions with one hand.



APC 3: NOW YOU CAN CONNECT EVEN MORE INSTRUMENTS

Besides the APC socket, an additional multifunctional socket is provided for further instruments. For the first time, this allows you to connect and use up to 6 instruments as required for your procedure.

***FiAPC probe**
patented: EP 1 515 659 B,
US 7,311,707 B, JP 4435680 B,
CN 1665451A
Design Patents: EP 436274,
CN 200630006257.4, US D577,671S,
JP 1287552

***APCapplicator with filter**
Design Patents: EP 2249672,
CN ZL201330438131.4,
KR 30-2013-0061155
Design patents pending:
US 29/475,689

FiAPC probe
with integrated
safety filter



APCapplicator with filter,
35-mm shaft (rigid), spatula electrode



Technical data

Power connection

| | |
|-----------------------------------|-------------------------------------|
| Low voltage | Via the VIO 3 electro-surgical unit |
| HF | Via the VIO 3 electro-surgical unit |
| Potential equalization connection | Yes |

Gas-specific unit data

| | | | |
|---|--|-----------------|-------------------|
| Input pressure | $(5 \pm 2) \times 10^5$ Pa | 5 ± 2 bar | 72.5 ± 29 psi |
| Max. output pressure | $2 \times 10^5 \pm 2 \times 10^4$ Pa | 2 ± 0.2 bar | 29 ± 2.9 psi |
| Adjustable gas flow | 0.1–8 l/min limited by the instrument connected in each case, configurable in 0.1 l/min increments | | |
| Nominal flow tolerance | ± 20 % [range: 0.1–8 l/min] | | |
| If you use a compressed gas cylinder, a warning is activated at | 7×10^5 Pa | 7 bar | 101.5 psi |
| Display of remaining quantity | VIO 3 display | | |
| Display of remaining pressure | Manometer on the gas cylinder | | |
| The APC 3 switches off at an input pressure of | $< 3 \times 10^5$ Pa | < 3 bar | < 43.5 psi |

Dimensions and weight

| | |
|------------------------|-----------------|
| Width x height x depth | 415 x 100 x 375 |
| Weight | 5.3 kg |

Ambient conditions for transport and storage of the unit

| | |
|-------------------|------------------|
| Temperature | -30 °C to +70 °C |
| Relative humidity | 10 %–90 % |

Ambient conditions for operating the unit

| | |
|-------------------|---------------------------|
| Temperature | +10 °C – +40 °C |
| Relative humidity | 15 %–80 %, non-condensing |

Standards

| | |
|--|------|
| Classification in accordance with EU directive 93/42/EEC | II b |
| Type in accordance with EN 60 601-1 | CF |

